

BLK 16 DEFU LANE 10. #01 - 364. SINGAPORE 539197
TEL : 6 289 2298 FAX : 6 287 9635

NEE SOON TOWN COUNCIL

CHONG PANG DIVISION

/09/2025

1. SIMULATED TEST
 - 1.1 Carry out a stimulated fire alarm call
 - 1.2 Operate any Alarm Zone
 - 1.3 Transmit a Fire Alarm Signal to the monitoring station and reset the system
 - 1.4 Simulate fire conditions on all alarm zones and reset the system to normal
 - 1.5 Disconnect battery and ensure visual & audible fault signals activated at main alarm panel
 - 1.6 Simulate main power failure and ensure system operate correctly with the standby battery power
 - 1.7 Simulate the fire alarm conditions and check the output signals availability
 - 1.8 Remote ancillary function is initiated during the fire alarm condition simulation test
 - 1.9 Simulate fault condition on all alarm zones to ensure main alarm panel is operating correctly
2. MONITORING STATION
 - 2.1 Contact the monitoring system prior to the transmitting of the fire alarm signal
 - 2.2 To warn them of the simulated fire condition to be tested
 - 2.3 Check & confirm with them after completion of test to ensure the fire alarm signal was received
 - 2.4 Advise the monitoring station that the system has been reset
 - 2.5 Notify them of intention to test and shut down the fire alarm system if applicable
3. BATTERY CONDITION
 - 3.1 Check the battery voltage in accordance with the manufacturer's instructions
 - 3.2 Check the battery conditions
 - 3.3 Check battery charging current in accordance with the manufacturer's instructions
 - 3.4 Check batteries and their terminals as specified by the manufacturer
 - 3.5 Ensure batteries and their terminals are in good servicable condition
 - 3.6 Examine to ensure that the specific gravity in each cell is correct
 - 3.7 Examine to ensure the level of the electrolyte in each cell is correct
 - 3.8 Check condition of battery cabinet for corrosion
 - 3.9 Ensure that batteries are stored in a secure condition
4. INDICATING LIGHTS
 - 4.1 Ensure that all indicating lights are operating correctly
 - 4.2 Replace any faulty indicating lights if any
5. SOUNDS
 - 5.1 Check operation of all alarm sounders
6. MAIN ALARM SYSTEM
 - 6.1 Check the main alarm panel is in a clean and operative condition
 - 6.2 Visually inspect the condition of components, terminations and cables
 - 6.3 Ensure that faulty parts are replaced
 - 6.4 Ensure that replacement has been carried out satisfactorily
7. SWITCHES
 - 7.1 Ensure that all switches are in the correct operating condition after completion of tests
 - 7.2 Take immediate steps to rectify the fault(s) should they exist
8. SMOKE DETECTORS
 - 8.1 Clean all smoke detectors every four months
9. DEFECTS
 - 9.1 Record in the log any fault(s) identified and that the above test has been carried out


[illegible]

Verified By :

1

2

(Name & signature)

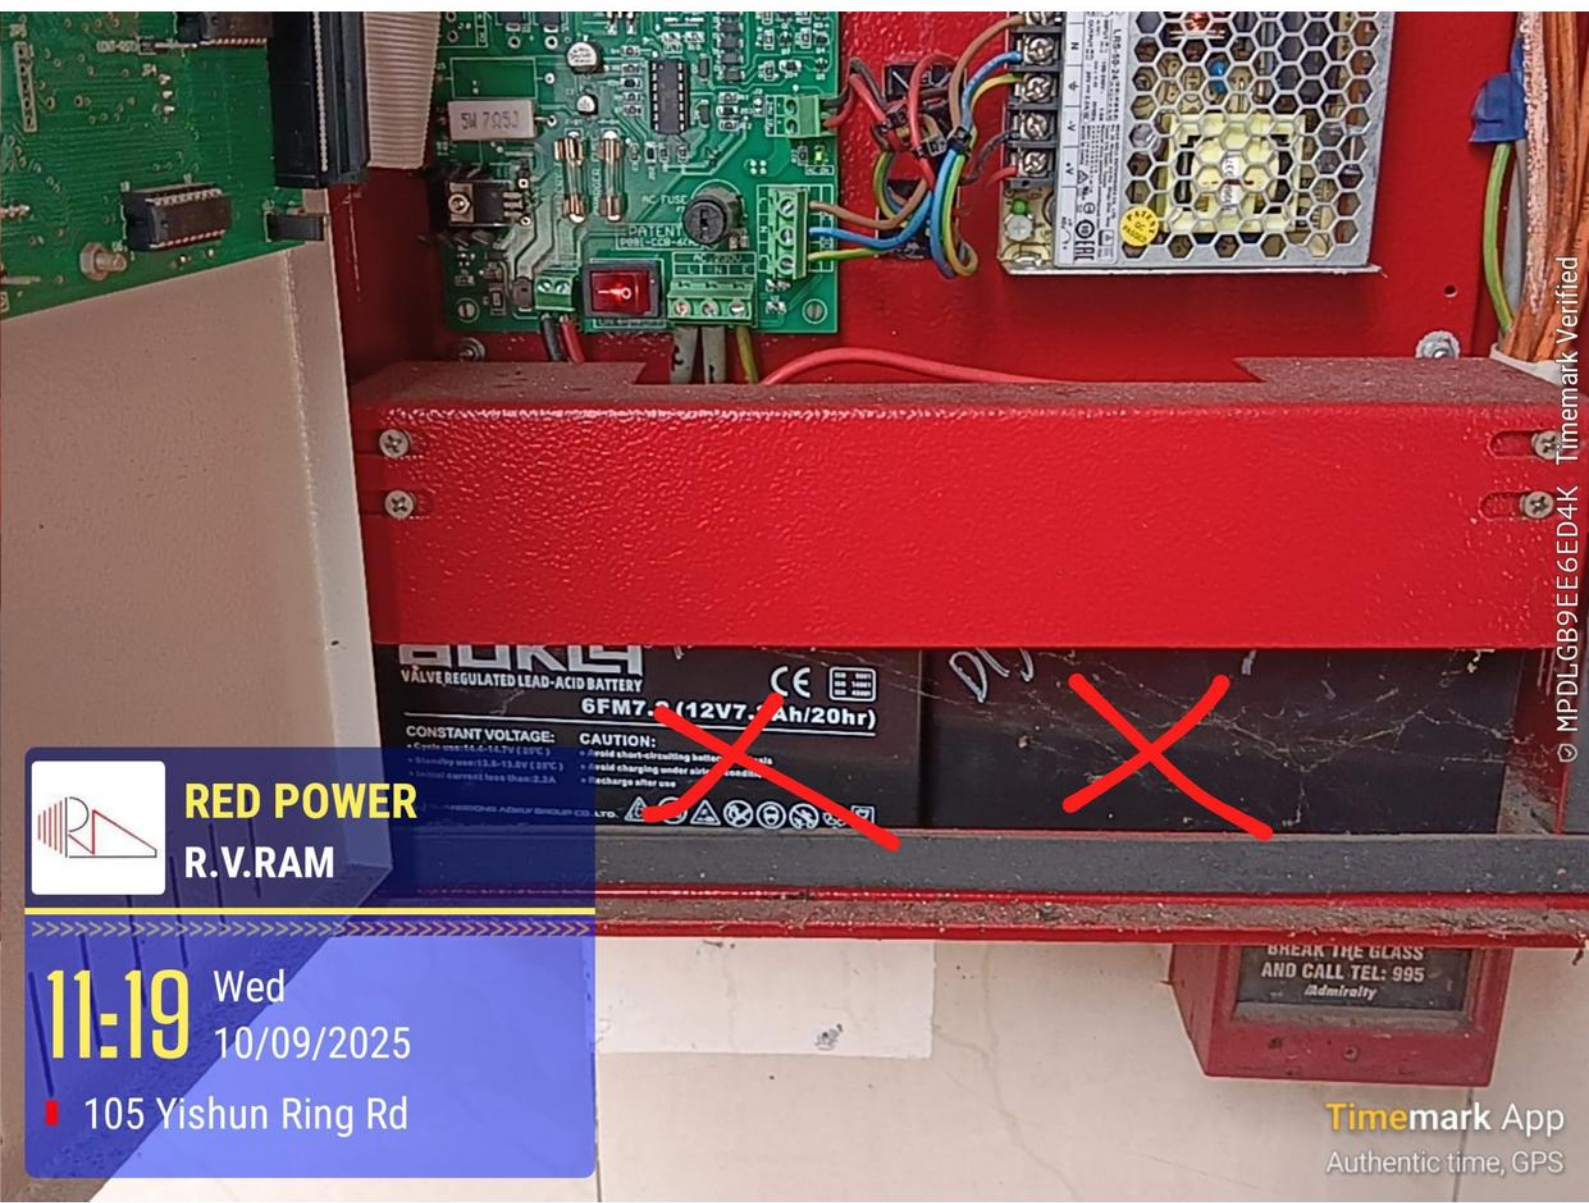


RED POWER
R.V.RAM

11:19 Wed
10/09/2025
105 Yishun Ring Rd

Timemark App
Authentic time, GPS

© MPDLGB9EE6ED4K Timemark Verified

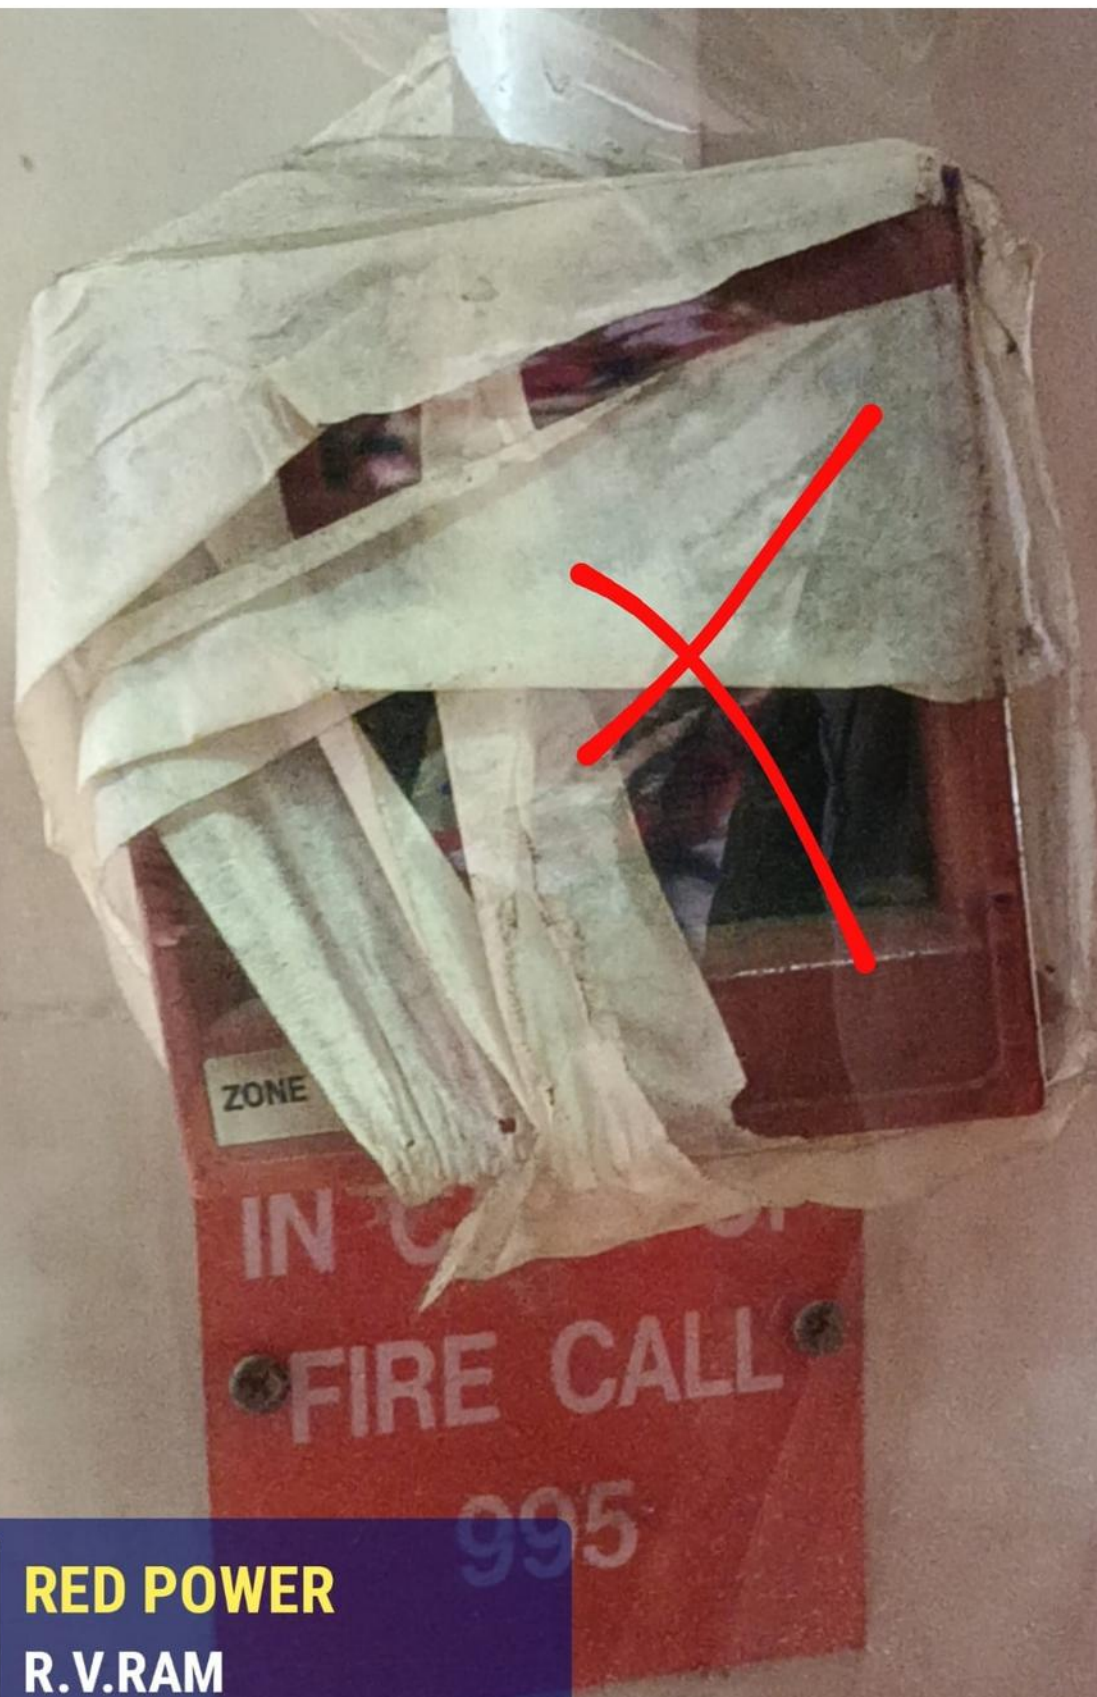

RED POWER
R.V.RAM

11:25 Wed
10/09/2025

■ 105 Yishun Ring Rd

Timemark App
Authentic time, GPS